

10/523150

Rec'd PCT/PTO 24 JAN 2005

Express Mail Label #EV561645958US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: ANTHONY CAREY

FOR: RELOCATABLE TRANSPORTABLE SAFETY CRASH BARRIER SYSTEM

CLAIM FOR PRIORITY

The Commissioner of Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

Applicant hereby claims the benefit of the filing date of July 24, 2002 of Australian Patent Application No. 2002950330 under the provisions of 35 U.S.C. 119 and the International Convention for the Protection of Industrial Property.

If any fees are due with regard to this claim for priority, please charge them to Deposit Account No. 06-1130 maintained by Applicant's attorneys.

Respectfully submitted,

CANTOR COLBURN LLP

By: 

Daniel F. Drexler  
Registration No. 47,535  
CANTOR COLBURN LLP  
55 Griffin Road South  
Bloomfield, Connecticut 06002  
Telephone: 860-286-2929  
Facsimile: 860-286-0115  
Customer No. 23413

Date: January 24, 2005

In re application of Anthony Carey

Atty Doc. No. CUL-0013

**BEST AVAILABLE COPY**

PCT/U03/00942




REC'D 02 SEP 2003

WIPO PCT

**PRIORITY  
DOCUMENT**SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)Patent Office  
Canberra

I, JULIE BILLINGSLEY, TEAM LEADER EXAMINATION SUPPORT AND  
SALES hereby certify that annexed is a true copy of the Provisional specification  
in connection with Application No. 2002950330 for a patent by WAYTOGO  
AUSSINDO PTY LTD as filed on 24 July 2002.

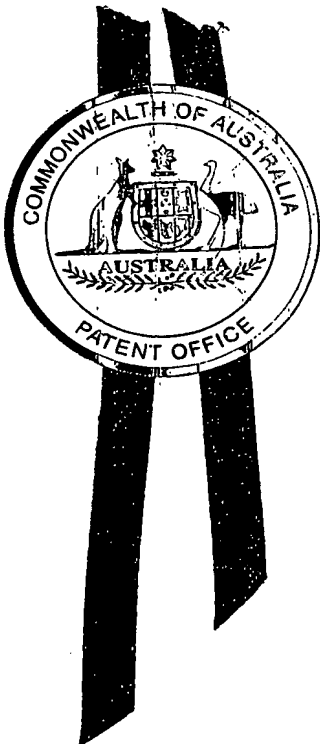WITNESS my hand this  
Seventh day of August 2003*J. Billingsley*JULIE BILLINGSLEY  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

## TRANSPORTABLE SAFETY CRASH BARRIER

### FIELD OF THE INVENTION

- 5 The present invention relates to transportable barriers, particularly of the type ballasted with fluid material such as water.

### BACKGROUND

- 10 A common situation is to provide an elongate barrier system for such purposes as guiding traffic and preventing ingress of pedestrians and vehicles into particular areas such as building and excavation sites. One form of barrier system used in such circumstances consists of a number of matching generally elongate modules which are connected end-to-end to form a barrier,
- 15 each module including or being a container adapted to be filled with a fluid such as water for ballast. The ballast provides the container with sufficient weight such that the barrier is not easily moved by contact from the type of traffic (pedestrians or vehicles) it is intended to control or guide.
- 20 Many such barriers are useful for limited purposes but generally lack the ability to safely absorb impacts, EG: accidental impacts by motor vehicles, without failure or excessively large lateral displacement, either of which defeats the purpose of the barrier. More specifically, there are regulatory standards now set for crash-resistant barriers for use with motor vehicle traffic
- 25 and most of the available modular, ballasted barriers fail to meet these standards and it is necessary to employ barriers of the type formed from concrete. The use of such barriers increases the difficulty in transporting and positioning the barriers due to the mass of the barrier elements that need to be transported.
- 30 Attempts have been made to modify ballasted barriers to enable them to function adequately as vehicular crash barriers. For example, one approach has been to provide an internal reinforced steel framework in each module, the framework being so designed that when modules are connected together
- 35 by fasteners the frameworks are effectively connected together, thus increasing the crash-resistance of the barrier. This approach suffers from the disadvantage of complexity of manufacture, assembly and weight of the empty, or unballasted, modules
- 40 We have now found a barrier that is able to resist impacts such as impacts by motor vehicles, and which avoids the use of modules with internal frameworks or bracing. The barrier of the present invention allows the use of existing modular barriers, which is advantageous, but could also encompass the use of purpose built barrier modules. In either case, the problems associated with
- 45 the weight of internal framing of modules are minimized or at least the consumer is provided with a useful or commercial choice. Also within the scope of the invention are fittings for use in the construction of the barrier of the present invention.

## SUMMARY OF THE INVENTION

According to one aspect of the invention, there is provided a transportable traffic barrier including a plurality of elongate modules connected end-to-end, each module having a cavity for receiving a ballast of fluid material wherein the barrier has at least one crash rail extending lengthwise along at least one side of the barrier wherein the at least one crash rail is secured to a deformable member and said deformable member is secured to the barrier.

In another aspect, the invention provides a method for providing a transportable traffic barrier including connecting a plurality of elongate modules end-to-end, ballasting at least some of the modules by filling respective cavities within said modules with a fluid, securing a deformable member to at least some of the modules and securing to the deformable members at least one crash rail extending lengthwise along at least one side of the barrier.

In another aspect, the invention provides a fitting assembly for mounting a crash rail to at least one elongate module having a cavity for receiving a ballasting fluid, each said module being adapted for end to end connection to an adjacent elongate module, said fitting assembly including a first part co-operable with a first face of a said module and securable to said first face by at least one fastener, a deformable member extending from said first part, and a connection means for engagement with the crash rail.

25

## DETAILED DESCRIPTION

A barrier constructed in accordance with the present invention is greatly stiffened against lateral deflections due to vehicle impacts by the crash rail. The greater the number of modules to which the crash rail is secured, the better this stiffening effect will be. The crash rail or rails may be of known type, such as rolled steel "V" sections made for the purpose or proprietary designed steel sections. In addition to providing an alternative form of construction to existing traffic barriers with crash-resistance, the invention allows easy handling and transport, permitting modules to be brought to site with or without crash rails or the fittings attached and assembled into a continuous barrier by connecting them end-to-end. After attaching the fittings (if not attached to the modules before their connection together) the crash rail itself may be attached and the modules ballasted as necessary by filling with fluid.

40

The barrier may be formed from any convenient ballasted modular barriers. Each module has a cavity for receiving ballast in the form of a fluid material. The barriers are ballasted with a fluid material. The fluid material is preferably water but may be any other fluid material, including other liquids and friable solids, such as sand. The barrier of the present invention may be formed from existing transportable modular barriers, including those whose modules are water containers formed of plastics materials, or may be formed from purpose built modules.

45

It is particularly preferred that the modules are substantially formed of a plastics material.

5 The modules are connected end-to-end. The end-to-end connection may be by any convenient means known to those skilled in the art.

10 The barrier has at least one crash rail extending lengthwise along at least one side of the barrier. It is preferred that the crash rail be secured to at least one fitting on each of the modules, or on each one of a contiguous plurality of the modules, included in the barrier. This minimizes "weak points" in the assembled barrier.

15 It is particularly preferred that the crash rail is formed of hot or cold-rolled steel. Preferably the crash rail is a steel W beam that is itself deformable hence it's structure. Other suitable crash rails include deformable QUAD beams.

20 A barrier according to the invention may have crash rails along both sides of the barrier, or where required, along one side only.

25 The at least one crash rail is secured to a deformable member and said deformable member is secured to the barrier. The deformable member deforms on impact with the barrier by a vehicle or the like where the impact exceeds a predetermined force. The deformable member may preferably be a metal plate of selected thickness extending laterally from the barrier.

30 The at least one crash rail is secured to a deformable member. The deformable member may include a flange for affixing directly or indirectly to the at least one crash rail. In the fitting assembly of the present invention the flange may be considered the connection means.

35 The deformable member is secured to the barrier. Preferably the deformable member includes a flange for connection to the respective module. In the fitting assembly of the present invention this flange may be considered the first part.

In a preferred embodiment the deformable member is a c-shaped section of mild steel, preferably with the flanges directed away from the oncoming traffic.

40 The fitting assembly of the present invention has a first part co-operable with a first face of a said module and securable to said first face by at least one fastener, a deformable member extending from said first part, and a connection means for engagement with the crash rail

45 It is preferred that the first part of the fittings conforms to a part of the contour of the module to which it is secured where it contacts the said module. At least one of the fittings may be adapted to be retained on a module by being captive on the module when assembled. For example, it may be captive in an opening or recess in the module. The said opening may be a hole defined by

and passing through the module, such as those provided in some known plastic barriers to stiffen and (in filled condition) lighten them.

5 Preferably, the first part of the fittings is secured to a module by a fastener such as a nut/bolt assembly. In a particularly preferred arrangement, said fastener passes through each of a pair of adjacent modules thereby to connect the pair of modules. These or some of the said fittings may include a part generally in the form of a strap or plate extending over a part of the surface of the module and secured thereto by the fastener. These or some of  
10 the said fittings may be secured to the module by the said fastener indirectly via an intermediate fitting.

15 The fastener may be a bolt/nut assembly, with the nut or a head of the bolt lying when in use in a recess in the module, and the intermediate fitting including a washer part which lies in contact with said nut or head and at least one further part connected to the washer and extending out of the recess to the said fitting. The said fastener at least one further part of the intermediate fitting may pass through an opening formed in the fitting.

20 A fitting secured to a module by a fastener as disclosed above may extend over opposing sides of the module or modules and may be secured to the module on each of said sides by the fastener.

25 In order that the invention may be more fully understood and put into practice, preferred embodiments thereof will now be described with reference to the accompanying drawings.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

30 Figure 1 is a perspective drawing of a known module such as is used for traffic barriers.

Figure 2 is a cross sectional view of the module shown in Figure 1 taken at the station marked by arrow "A" in Figure 1.

35 Figure 3 is a cross sectional view of the module shown in Figure 1 taken at the same station as the view in Figure 2, the module now being part of a barrier according to the invention.

40 Figure 4 is a perspective exploded view of certain parts of the barrier shown in Figure 3.

45 Figure 5 is a cross sectional view of a further embodiment of a barrier according to the invention taken at the longitudinal station marked by the dotted line "B" in Figure 1.

Figure 6 is a partial cross sectional view taken at "BB" in Figure 5.

Figure 1 shows a module 1 used for transportable barriers at building sites,

for traffic guidance and the like. The phantom extension in the figure indicates the outlines of part of a barrier 2 assembled by connecting together, end-to-end, several matching barrier modules of this type, including modules 13 and 14. The module 1 is hollow and formed of a plastics material and is adapted to be filled with water or other liquid as ballast. There are holes 3 formed in the module 1 to stiffen the sides 4 of the module 1 against deflection due to hydrostatic pressure when the module 1 is filled. For end-to-end connection of the module 1 to other matching modules 13 and 14, protruding end pieces 5, 6, 7 and 8 are provided, which interlock with corresponding protrusions 15, 16, 17 and 18 on modules 13 and 14.

Figure 2 is a cross-section at holes 9 and 10 (at a longitudinal station indicated by arrow "A") of the module 1 and shows how the protrusions 5 and 6 interlock with protrusions 15 and 16 of adjacent module 13. Connection of adjacent modules is by nut/bolt assemblies such as 19 / 19a and 20 / 20a passing through holes 9 and 10 of the protrusions 5 and 6 and matching holes 21 and 22 in module 13, and similarly at the other end of the module 1. The holes 9, 10, 21 and 22 are so formed that ballast liquid (not shown) is retained in the module 1.

Figure 3 is an identical view to that in Figure 2 of a module 24 of a barrier 23 according to the invention, the module 24 being of the same type as module 1. A fitting 25 is secured to the module 24 and to that fitting 25 is secured an elongate crash rail 26 of known type (i.e. of roll-formed steel, and having a "W" cross-section). Other types of crash rail could of course be used. A nut/bolt assembly 27 secures the crash rail 26 to the fitting 25.

As best seen in Figure 4, the fitting 25 includes a steel strap 28, bent to conform to the cross-sectional shape of the assembled barrier 23. To the strap 28 is welded a support 29 for the crash rail 26. The strap 28 has sections 30 and 31 which allow the fitting 25 to sit stably on the module 24 for convenience during assembly of the barrier 23 before bolts 31 and 32 are passed through holes 33, 34, 35 and 36 in the module 24 and an adjacent module 37 to join modules 24 and 37. Assembly of nuts 38 and 39 with washers 40 and 41 to the bolts 31 and 32 completes the joining process.

Normally, but not essentially, the crash rail 26 is in sections of length exceeding the lengths of modules 24 and 37, such crash rail sections being bolted together as is known in the art.

It will be noted that the holes 33, 34, 35 and 36 lay within recesses 42, 43, 44 and 45. To enable the bolts 31 and 32 to retain the fitting 25 in place, intermediate fittings 46 and 47 are provided which have washer-like parts 48 and 49 through which bolts 31 and 32 pass. Extensions 50, 51, 52 and 53 pass through openings 54 and 55 in the strap 28 and in turn retain the strap 28 in place on the modules 24 and 37. Intermediate fitting 47 is omitted from Figure 4 for clarity, but as can be seen in Figure 3 is similar to intermediate fitting 46.

It will be immediately apparent that the strap 28 of the fitting 25 could be extended down the sides 56 and 57 of the modules 24 and 37 so that, via intermediate fittings (not shown) the same as intermediate fittings 46 and 47, the strap could be secured on both sides of the modules 24 and 37 by the bolts 31 and 32. This is also within the scope of the invention. It would also be possible to locate a support similar to the support 29 to such an extension of strap 28, so that a second crash rail (not shown) could be located on the opposite side of the barrier 23 to the crash rail 26. This also is within the scope of the invention.

There are of course other ways to achieve the basic objective of providing one or more crash rails such as the crash rail 26 on a barrier made of modules such as the modules 1 or 24. Figure 5 is a cross sectional view of a module 60 of a barrier 61 according to the invention, the module 60 being of the same type as module 1. A fitting 62 including a support 64 is provided for mounting of a crash rail 63 and is captive in a lightening and stiffening hole 66 the same as the hole 3 of the module 1. A plate 65 conforming to the surfaces 67 and 68 of the module 60 is held thereagainst by bolt/nut assemblies 69, 70, 78 and 79. These pass through tubes 71, 72, 73 and 74 welded to the plate 65 and through a plate 75 bearing against the opposite sides 76 and 77 of the module 60. Thus the fitting 62 is captive in the hold 66, and the crash rail 63 is supported.

Still other ways of supporting an external crash rail on a barrier of modules such as module 1 will be apparent and lie within the scope of the invention. The descriptions above have been based on a particular style of module, but other module designs are known and a person skilled in the art could readily adapt the described parts to suit these. Moreover, purpose built modules could be made and used. These could for example have simpler and/or more convenient fixing arrangements for the fittings that support the crash rail or rails.

Persons skilled in the art will appreciate that the invention described above may be subject to improvements and modifications that will be apparent without departing from the spirit and scope of the invention described herein.

The following claims are within the scope of the invention and disclose further aspects of the invention.




## Claims

1. A transportable traffic barrier including a plurality of elongate modules connected end-to-end, each module having a cavity for receiving a ballast of fluid material wherein the barrier has at least one crash rail extending lengthwise along at least one side of the barrier wherein the at least one crash rail is secured to a deformable member and said deformable member is secured to the barrier.
2. A transportable traffic barrier including connecting a plurality of elongate modules end-to-end, ballasting at least some of the modules by filling respective cavities within said modules with a fluid, securing a deformable member to at least some of the modules and securing to the deformable members at least one crash rail extending lengthwise along at least one side of the barrier.
3. A fitting assembly for mounting a crash rail to at least one elongate module having a cavity for receiving a ballasting fluid, each said module being adapted for end to end connection to an adjacent elongate module, said fitting assembly including a first part co-operable with a first face of a said module and securable to said first face by at least one fastener, a deformable member extending from said first part, and a connection means for engagement with the crash rail.

DATED this 24 day of July 2002

By Their Patent Attorneys  
CULLEN & CO.

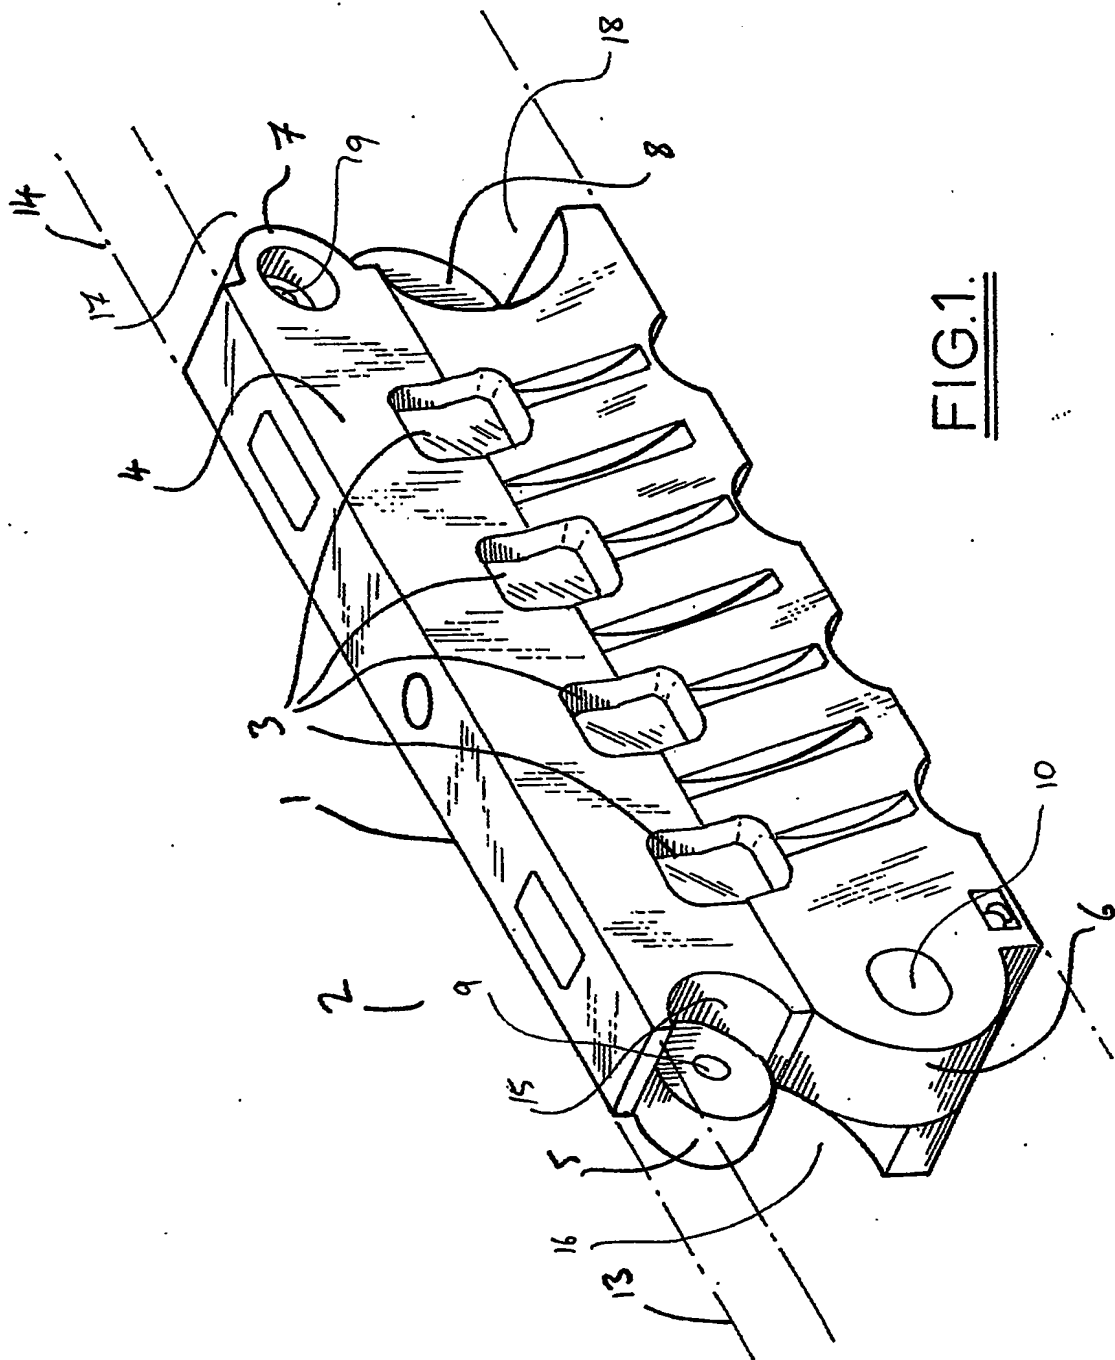

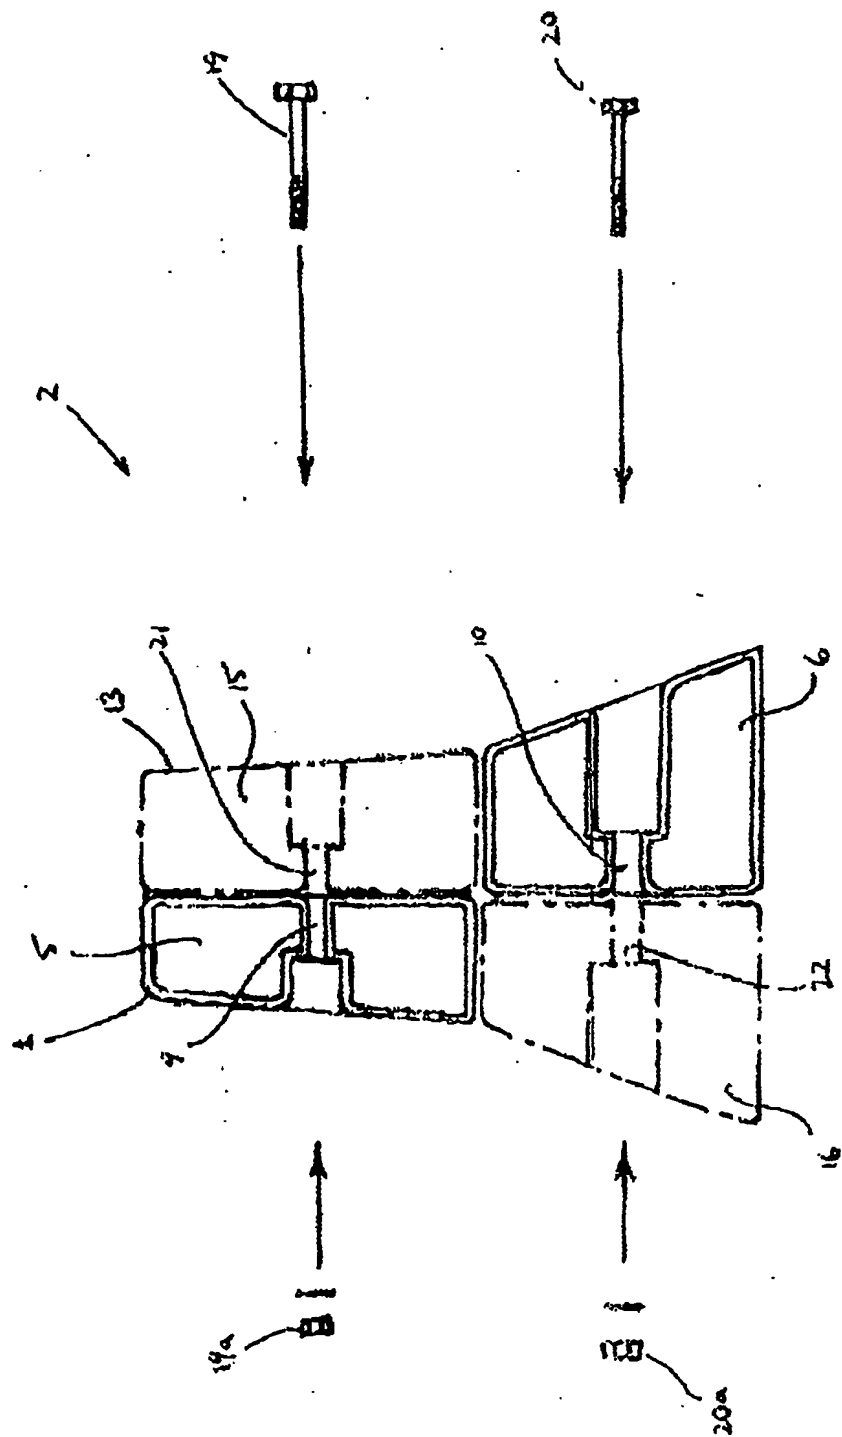


FIG. 1




Fig. 1

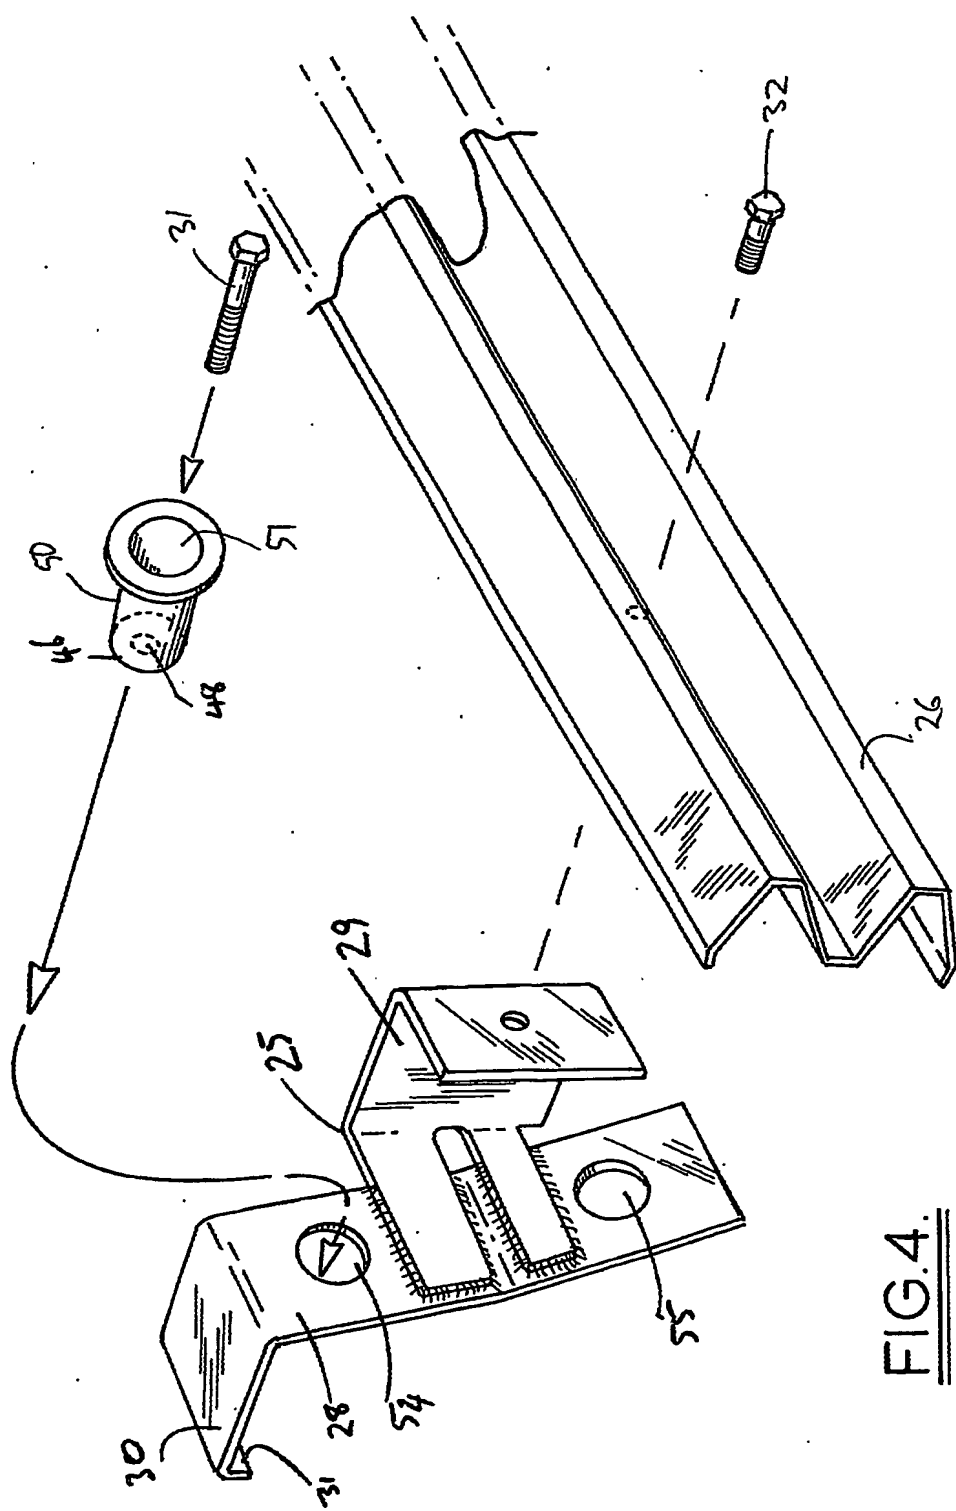


FIG. 4.

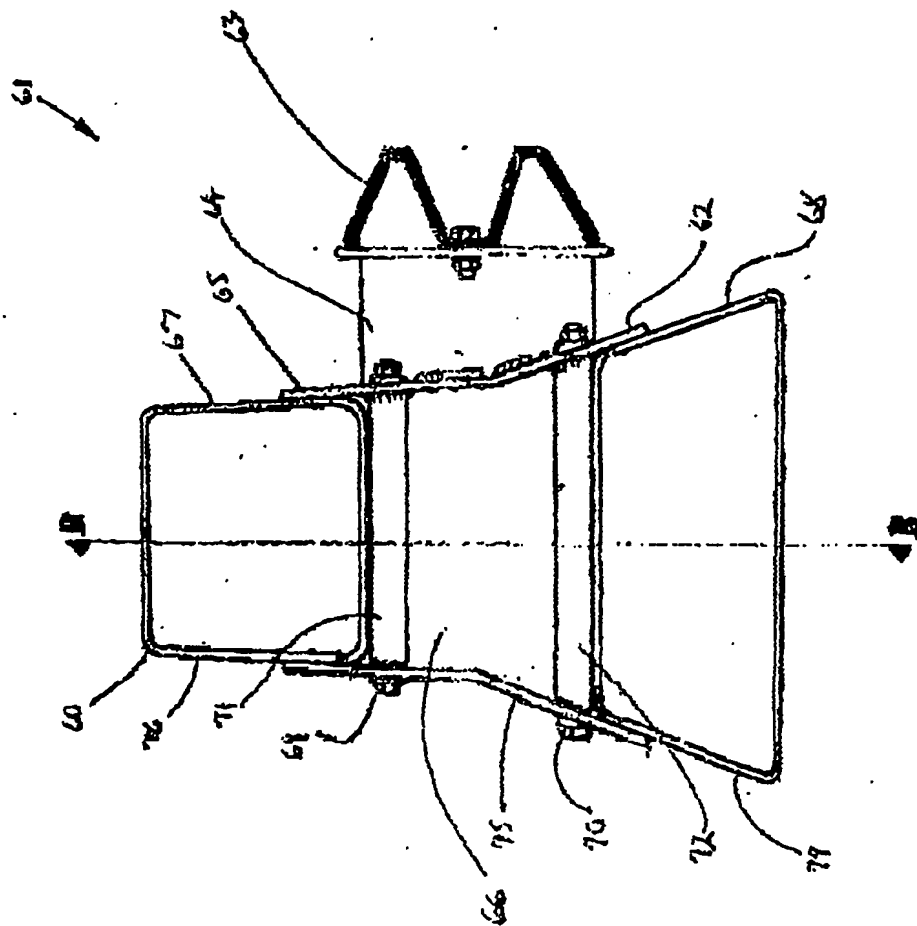


FIG. 5.

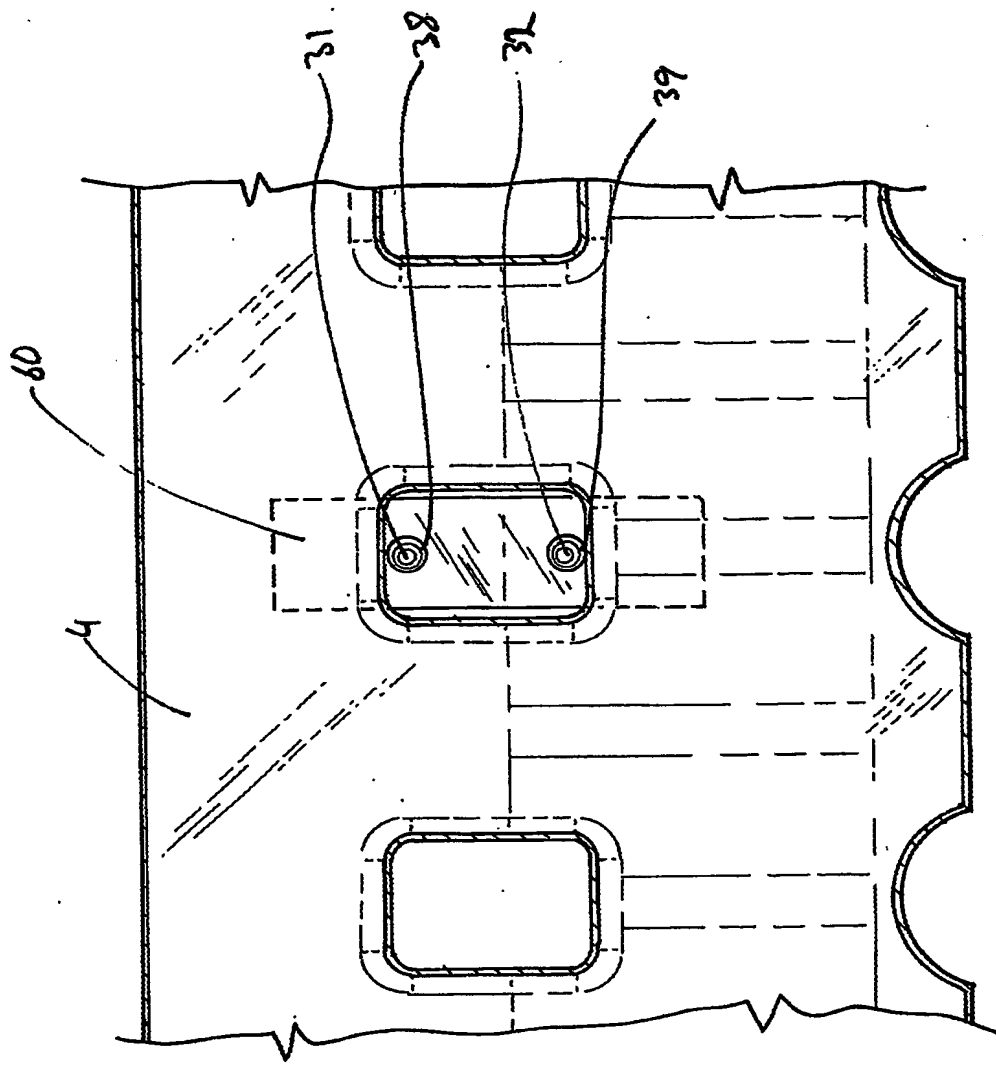


FIG. 6.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**